

# SYSTEM FOR HEATING VISCOUS OIL USING HEAT PUMPS

C. EPARU<sup>1</sup> S. NEACȘU<sup>1</sup> R. RĂDULESCU<sup>1</sup> M.  
ALBULESCU<sup>1</sup>

**Abstract:** *In the case of viscous oil transport through pipelines, one of the methods used to decrease the oil viscosity consist in its heating.*

*In the laboratories of Thermotechnics from Petroleum-Gas University of Ploiești a new heating system was created, a system for viscous oil with a heat pump water-water that uses the surface geothermal energy as cold source. The paper describes the system used for heating the oil and also its performance compared with the classical systems.*

**Key words:** *heat, pump, viscous, oil*

## 1. Introduction

Currently, the most prevalent method in practice for the transport of crude oil is pumping after heating it, before the main pumping station at a temperature which must not exceed 70 °C to avoid losses by evaporation.

At the present moment oil heating is done in tanks with heat exchangers of various construction types. The solution depends on both the type and volume of the tanks, and also on the size of the surface.

Generally, in order to heat a petroleum product, the heat produced by burning fossil fuels is used, either directly by the combustion gases or indirectly by hot water or water vapors.

Emissions of pollutants and greenhouse gases and the growth of prices of fossil fuels needed to produce heat have led to alternative solutions for heating using renewable energy.

For experimental testing of crude oil

transportation in the sticky neizoterm heated with a heat pump type of ground-water, a mini-system transport was performed in a laboratory from the Petroleum – Gas University of Ploiesti.

## 2. Description of the proposed heating system

A heat pump from the equipment of laboratory of Renewable Energy Sources was used for heating the oil (Figure 1).

The heat pump is coupled to 4 systems of heat extraction from the soil: a 15-meter groundwater well with the hydrostatic level at 4m, a spiral loupe of polyethylene with a length of 180m buried at a depth of 2m, a 40 meters shaft with a loop of polyethylene inserted and a simple loop of polyethylene buried at 1m, with the total length of 60m.

Operating parameters of the heat pump are monitored constantly through a performant data acquisition system. The monitoring pump situation is presented in Figure 2.

---

<sup>1</sup> Hydraulics, Thermotechnics and Reservoir Engineering, *Petroleum-Gas* University of Ploiești

The oil tank is fitted with two copper coils that circulate hot water from the heat pump.

Temperature transducers were mounted in order to control the heating process in the tank (Figure 3).



Fig. 1. Heat pump in the laboratory of Renewable Energy

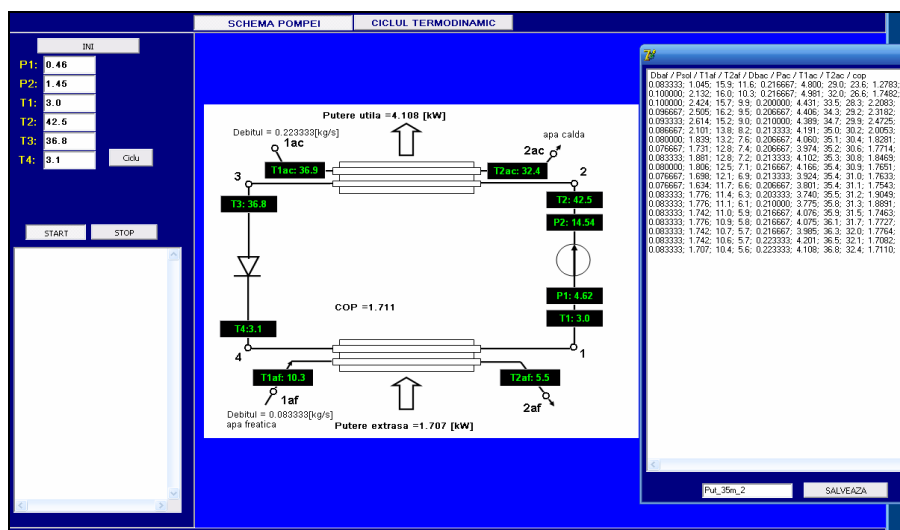


Fig. 2. The monitoring pump situation



Fig. 3. Temperature transducers control the heating process in the tank

### Experimental results

The 800 liters of crude oil stored in the tank were heated with hot water from the heat pump. The water has approximately 60°C at the pump discharge.

Three versions were chosen for presentation from these experiments.

In the first experiment the crude oil was heated from 8°C to 28°C without a mechanical agitation for a period of 150 minutes (Figure 4).

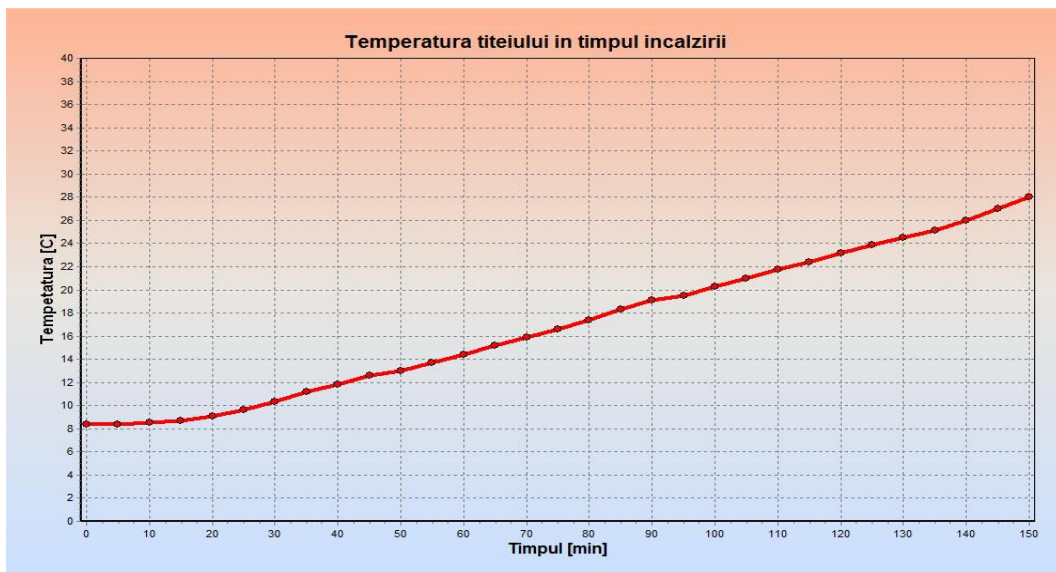


Fig. 4. The crude oil temperature evolution

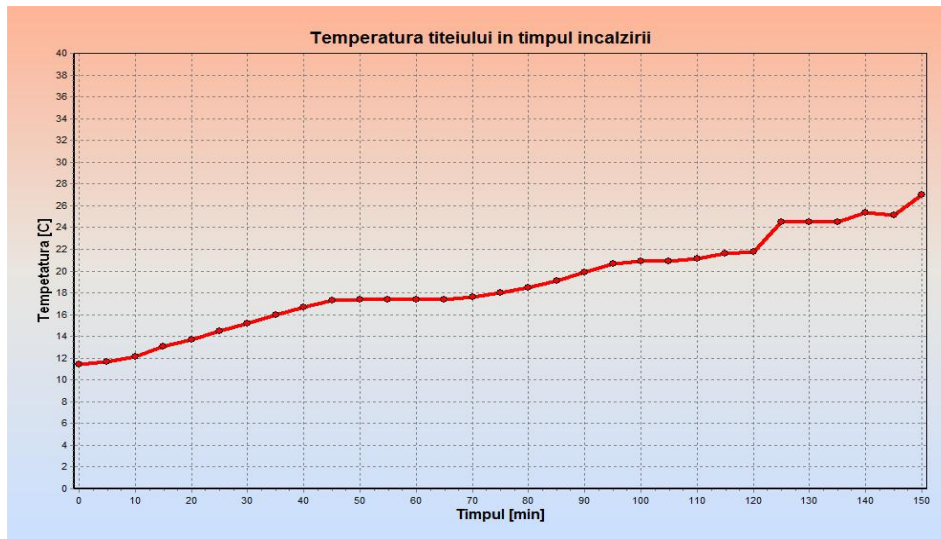


Fig. 5. *The heating bubbling process*

The rate of temperature variation is relatively uniform 0.15 °C/min.

One could observe during the experiment that the oil temperature is stratified, lower at the bottom of the tank and higher at the top; there is a difference of almost 3°C.

In the following experiments, during the heating process, a stirring of the oil from

the tank was performed, bubbling with compressed air, for the uniformization of temperature.

The heating bubbling process is shown in figures 5 and 6. It changes the appearance of the heating curve during the bubbling and shortly after. The temperature increases faster than the rest.

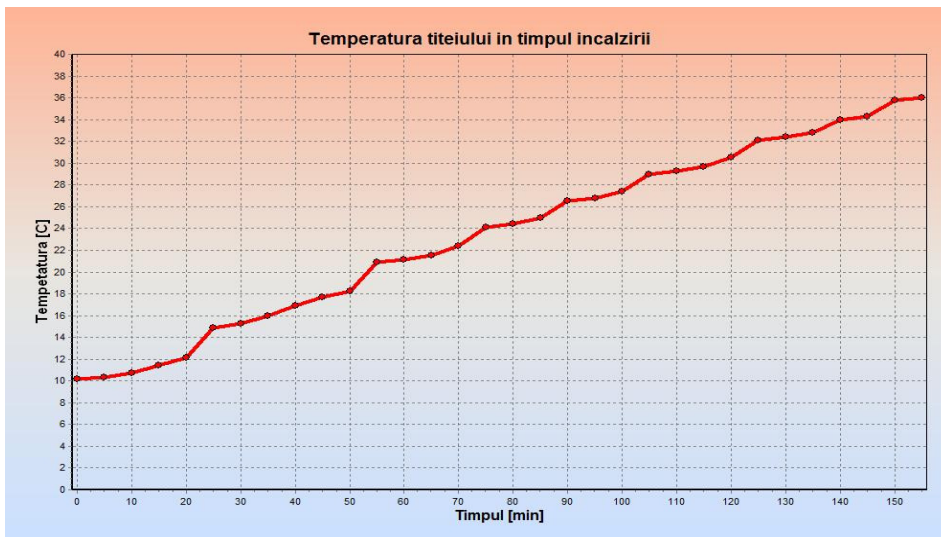


Fig. 6. *The heating bubbling process*

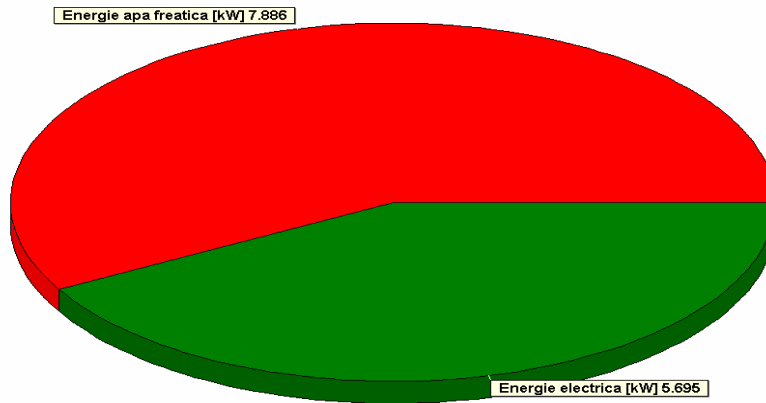
**Bilantul energetic pentru pompa de caldura**

Fig. 7. Energy balance of heat pump

From one experiment to another the increase of heating efficiency was pursued, so in Figure 6 the best obtained version is presented. A rate of temperature increase of  $0,173^{\circ}\text{C}/\text{min}$  was achieved.

Energy balance of heat pump for the duration of the heating process is shown in Figure 7.

From this diagram follows the reasoning of using heat pumps for heating viscous oil. Even if we didn't use a heat pump with high performance, it can be easily seen the energy saving achieved for the process of oil heating.

### Conclusions

The essential novelty consists in the replacement of classical heating oil system with a heat pump of ground-water type. This takes the heat from the soil using heat exchangers made of polyethylene pipes in various geometry or from groundwater. The pump provides this energy as hot water at a temperature of  $55\text{-}60^{\circ}\text{C}$  with a COP of 3-3,5.

The oil heating is made before pumping into a tank through two coil pipes. Experimentally, heating the oil from  $4\text{-}5^{\circ}\text{C}$  up

to  $36^{\circ}\text{C}$  was a successful undertake, a temperature that is sufficient to non-isothermal transport process because it does not affect the evaporation of volatile fractions.

Using this new technology of heating oil with heat pumps makes a 60-70% reduction in the amount of energy needed for the heating process, and in the same proportion it reduces pollutants and greenhouse gases.

This paper shows that for viscous oil heating the technology proposed for heating the oil with ground-water heat pumps can be used successfully. This allows achieving the necessary temperatures for pumping, using a renewable and non-polluting energy resource.

### References

1. Eparu, C.: *Cercetări privind fenomenele termo-hidrodinamice specifice curgerii țiteiurilor vâscoase prin conducte*. In Ph.D. Thesis, Ploiești, 2009.
2. Eparu, C.: *Sisteme performante, ecologice de încălzire a țiteiului vâscos pentru transport*. Ploiești. Editura Universității Petrol-Gaze din Ploiești, 2007.

3. Eparu, C., Albuiescu, et al.: *Experimental research regarding the dynamics of temperature field around buried pipes for viscous oil transport*. In: Conferința internațională "Science and Technology in the Context of Sustainable Development", Ploiești, 2008.
4. Neacșu, S., Trifan, C., et al.: *Răspunsul termic al solului în cazul utilizării pompelor de căldură*. Conferința națională de termotehnică cu participare internațională, Ediția XVI-a, Ploiești 2007, Vol. 2, p. 151.
5. Neacșu, S.: *Termodinamica sistemelor tehnice*. Editura Universității din Ploiești, 2003.
6. Oroveanu, T., David, V., et al.: *Colectarea, transportul, depozitarea și distribuția produselor petroliere și gazelor*. București. Editura Didactică și Pedagogică, 1985.
7. Pătărlăgeanu, M., Neacșu, S.: *Posibilități de reducere a consumului energetic de transport în cazul curgerii neizoterme a produselor petroliere prin conducte*. Industria de Petrol și Gaze. Prezent și perspectivă, Ploiești, 1992, Vol. Energetică, p. 111.
8. Sanner, B.: *Prospects for Ground-Source Heat Pumps in Europe*, Newsletter IEA Heat Pump Centre, 17/1, 1999.
9. Trifan, C., Albuiescu, M., Neacșu, S.: *Elemente de mecanica fluidelor și termodinamică tehnică*, Ploiești. Editura Universității Petrol-Gaze din Ploiești, 2005.
- 10.\*\*\* Contract nr. 259/2007, PNCDI II, Programul Resurse umane, tip de proiect TD, *Cercetări privind fenomenele termo-hidrodinamice specifice curgerii țiguiurilor vâscoase prin conducte*.