



INTERNATIONAL SCIENTIFIC CONFERENCE

CIBv 2010

12 – 13 November 2010, Braşov

NUMERICAL MODELING OF FLEXIBLE PAVEMENT STRUCTURES REINFORCED WITH GEOSYNTHETICS

Constantin ROMANESCU*, Elena DIACONU*, Ştefan Marian LAZĂR*

* Department of Roads and Railways, Technical University of Civil Engineering Bucharest
Corresponding author: Ştefan Marian LAZĂR, E-mail: lazar@cfdp.utcb.ro

Abstract: Numerical modeling techniques is an opportunity to understand the mechanics of flexible pavement structures reinforced with geosynthetics. The paper presents results from finite element modeling, on the state of stress and strain analysis of a flexible pavement structures reinforced with geosynthetics in different versions of their location. The study highlights the reinforcement function of geosynthetic materials and determine optimum layout of geosynthetic within reinforced asphalt overlays. It follows that the use of geosynthetic materials to reinforce asphalt layers of flexible pavement structures has a positive effect on their bearing capacity, leading to increased calculus traffic volume that it can support a road.

Key words: numerical modeling, flexible pavement structures, geosynthetic.

1. INTRODUCTION

Experimental studies over the past years have shown the benefits of geosynthetics use as reinforcement materials of flexible pavement structures (Diaconu and Burlacu, 2004 [1]; Diaconu and Răcănel, 2005 [2]; [3]; Diaconu, Lazăr et al., 2007 [4]; Romanescu, Lazăr et al., 2009 [5]).

Existing design solutions, in most cases empirical, are unable to take into account many variables that influence the benefit derived from the geosynthetic reinforcement.

Advanced numerical modeling techniques are an opportunity to understand the mechanics of these systems and provide simplified numerical formulations incorporating the essential features necessary to predict the behavior of geosynthetic reinforced flexible pavement structures.

1.1 Numerical modeling of flexible pavement structures

With the general evolution of the finite element method is developed also the numerical modeling of flexible pavement structures by finite element method. The first programs used in common practice frequently consist in two-dimensional axisymmetric models with linear or nonlinear elastic properties of the materials in the composition of pavement structure layers. Programs like AXYDIN and MICH-PAVE have been developed based on this pattern [6].

1.2 2D axisymmetric finite element modeling

The paper uses a 2D axisymmetric finite element model for the state of stress and strain analysis of flexible pavement structures, which was developed using a computer program based on Finite Element Method (FEM) (Romanescu and Lazăr, 2008 [7, 8]; Romanescu and Lazăr, 2009 [9]).

In finite element method analysis of flexible pavement structures, the area of interest (road structure and subgrade) is discretized into a number of finite elements with vehicle load on top of the model.

The pavement structure layers have been modeled with 2D finite elements of axisymmetric solid type, of quadrilateral form, with eight nodes in isoparametric formulation, available in the library of the LUSAS computer program [10].

2. CALCULATION ASSUMPTIONS

2.1 Layout variations of the geosynthetic material

In this study different variants of geosynthetic positioning within the reinforced flexible pavement structure (Table 1) were analyzed to see the influence of this aspect to the state of stress and strain.

Variants analyzed are as follows:

- Variant I: classical reinforcing of the existing pavement structure without geosynthetics;
- Variant II: reinforcing with the geosynthetic layout between the existing pavement structure and new layers of reinforcement;
- Variant III: reinforcing with the geosynthetic layout between new clothing course and new base course, so between the binder and bituminous anrobat.

Table 1 The geosynthetic layout

Material in pavement structure layer	Layer thickness, cm		
	Variant I	Variant II	Variant III
Asphalt concrete, BAR 16	4	4	4
Binder, BAD 25	5	5	5
Geosynthetic	-	-	0,5
Bituminous anrobat, AB 2	6	6	6
Geosynthetic	-	0,5	-
Existing bituminous layers	18	18	18
Granular material, Ballast	25	25	25
Natural subgrade type P5	∞	∞	∞

2.2 Deformation characteristics of materials

The characteristics of materials what are included in pavement structure layers are listed in Table 2.

Table 2 Material characteristics of pavement structure

Material in pavement structure layer	Thickness, h, cm	Dynamic elasticity modulus, E, MPa	Poisson's ratio, μ
Asphalt concrete, BAR 16	4	3600	0,35
Binder, BAD 25	5	3000	0,35
Bituminous anrobat, AB 2	6	5000	0,35
Geosynthetic	0,5	20000	0,35
Existing bituminous layers	18	3000	0,35
Granular material, Ballast	25	168	0,27
Natural subgrade type P5	∞	70	0,42

2.3 Type of analysis

The three variants of reinforced flexible pavement structures are subjected to an axisymmetric analysis type. The following assumptions were made:

- measure units: N, m, kg, s, °C;
- meshing was performed with axisymmetrical isoparametric finite elements;
- all the pavement structure layers work in the elastic domain;
- the layers are perfect bonded at the interface;
- the 115 kN standard axle loading is applied on the tire contact area (footprint);
- the state of stress is an axisymmetrical one;
- the model resting is also axisymmetrical.

3. FINITE ELEMENTS ANALYSIS RESULTS

After conducting the analysis of three different pavement structures has resulted the state of stress and strain in the linear elastic behavior stage.

It was intended to estimate the response of each pavement structure in its critical points corresponding to the design criteria of the existing rules:

$\varepsilon_r (E_x)$ = horizontal strain at the bottom of the asphalt layers;

$\varepsilon_z (E_y)$ = vertical strain at the top of the subgrade;

and, as a novelty, at the edge of the tire footprint

$\tau_{rz} (S_{xy})$ = shear stress at the bottom of the binder course.

In figures 1, 2 and 3 are presented comparatively the variations in the axis of loading, throughout the depth of pavement structures, of the three design parameters presented above, corresponding to each geosynthetic layout variant.

For a more comprehensive representation on the behavior of flexible pavement structures reinforced with geosynthetic materials, still have examined the following parameters:

$\sigma_r (S_x)$ = horizontal tensile stress;

$\sigma_z (S_y)$ = vertical compressive stress;

and also, deflection basin, where

$\delta (D_y)$ = elastic deformation at the surface of the pavement structure (deflection).

Results are presented graphically in the following figures (4, 5 and 6).

From Figure 4 it is noted that at the bottom of asphalt layers reinforced with geosynthetic material occurs stresses with maximum values. These stresses concentration highlight the increased of the armed asphalt layers stiffness.

This indicates the geosynthetic beneficial effect of reinforcing the asphalt layers.

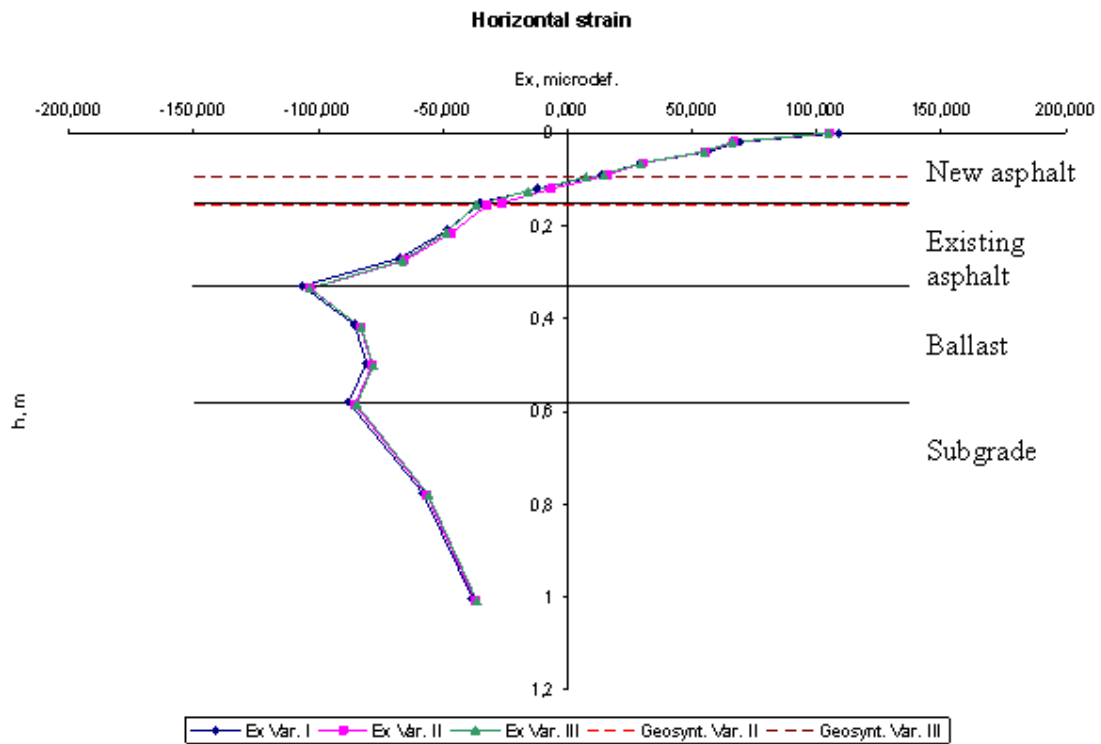


Fig. 1 Strain variation in horizontal direction; Signs convention: (-) tension; (+) compression

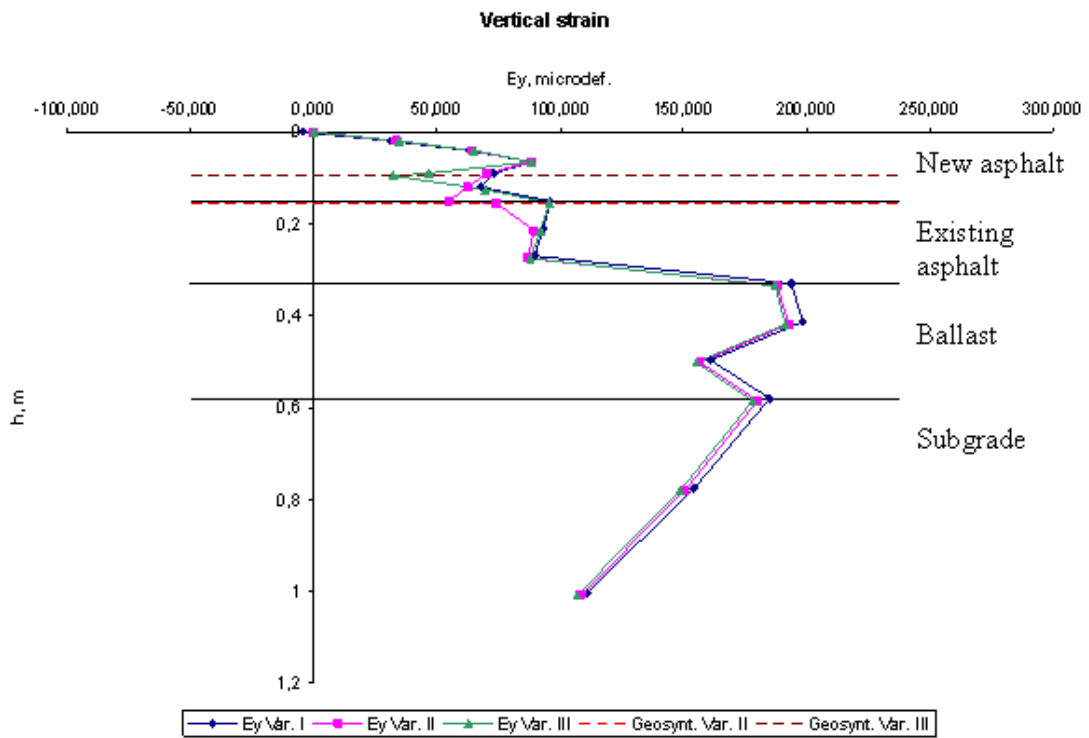


Fig. 2 Strain variation in vertical direction; Signs convention: (-) tension; (+) compression

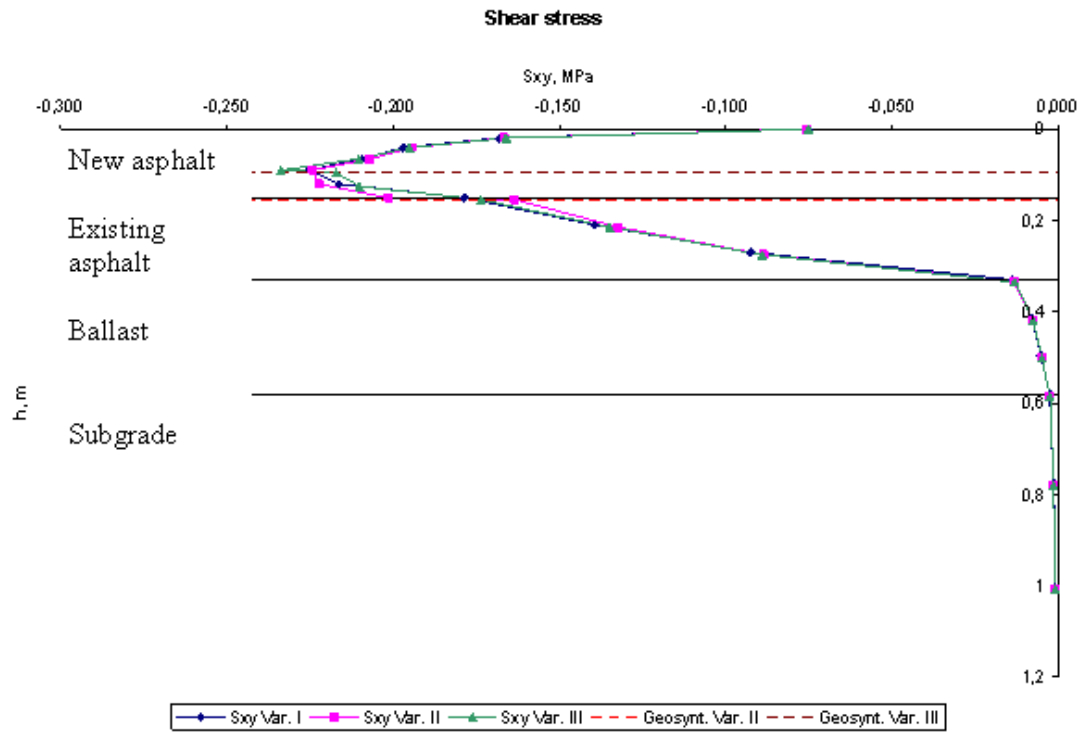


Fig. 3 Shear stress variation

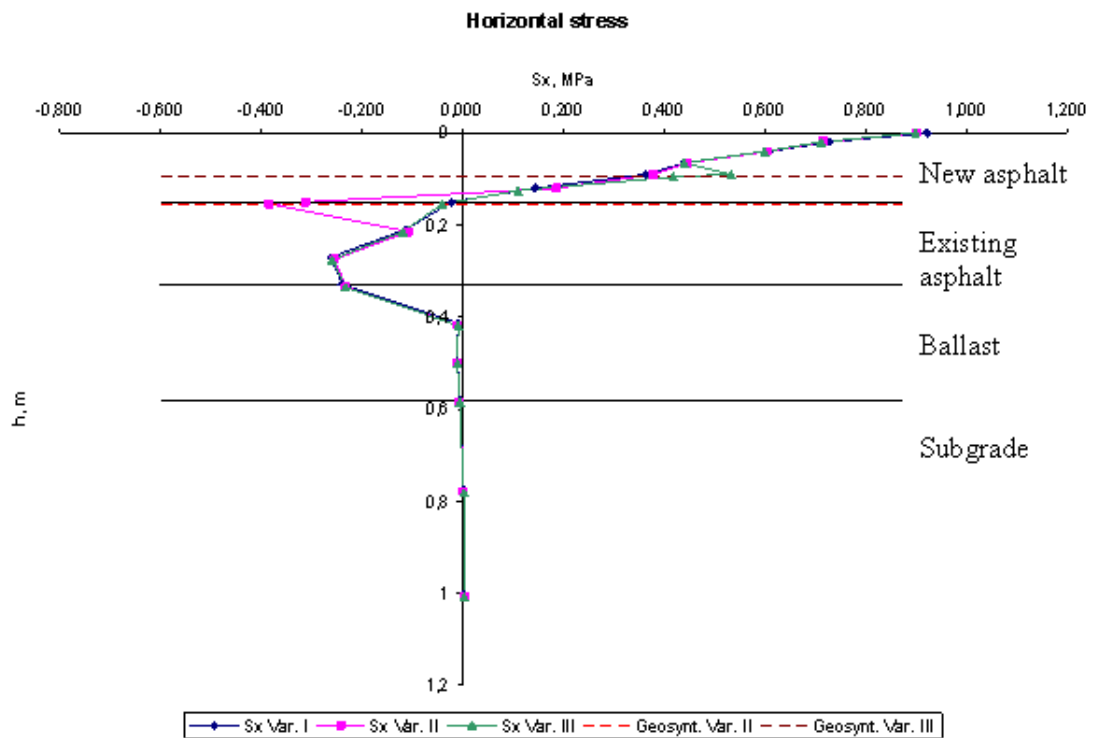


Fig. 4 Horizontal stress variation

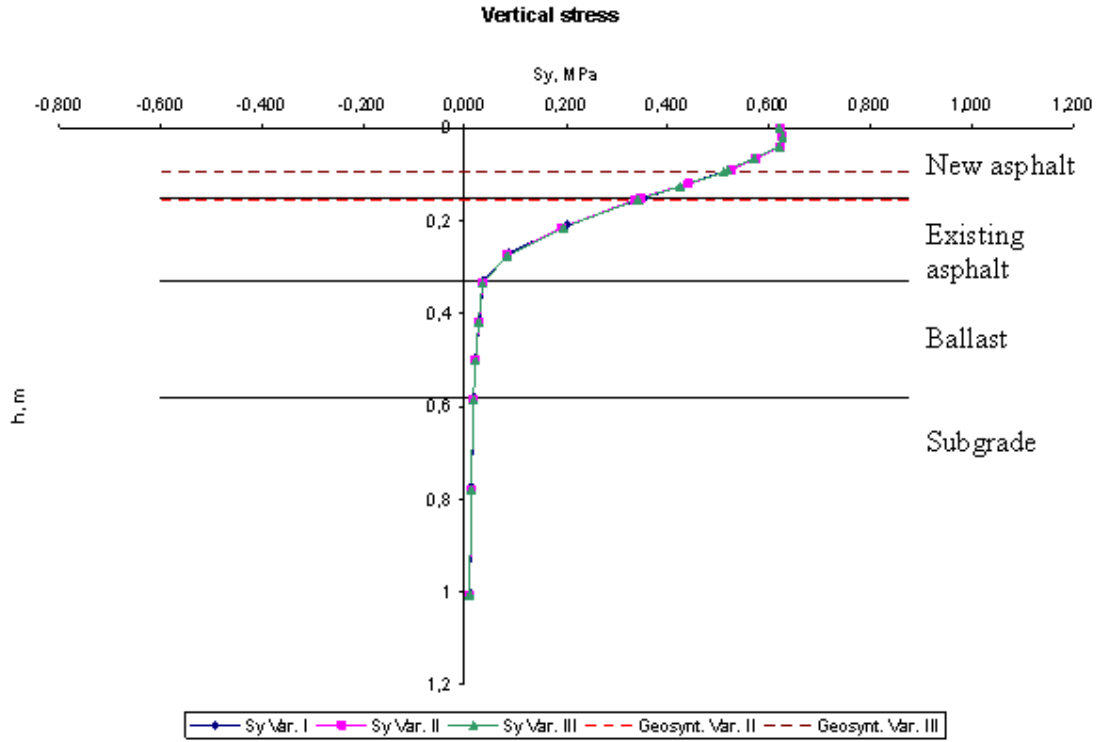


Fig. 5 Vertical compressive stress variation

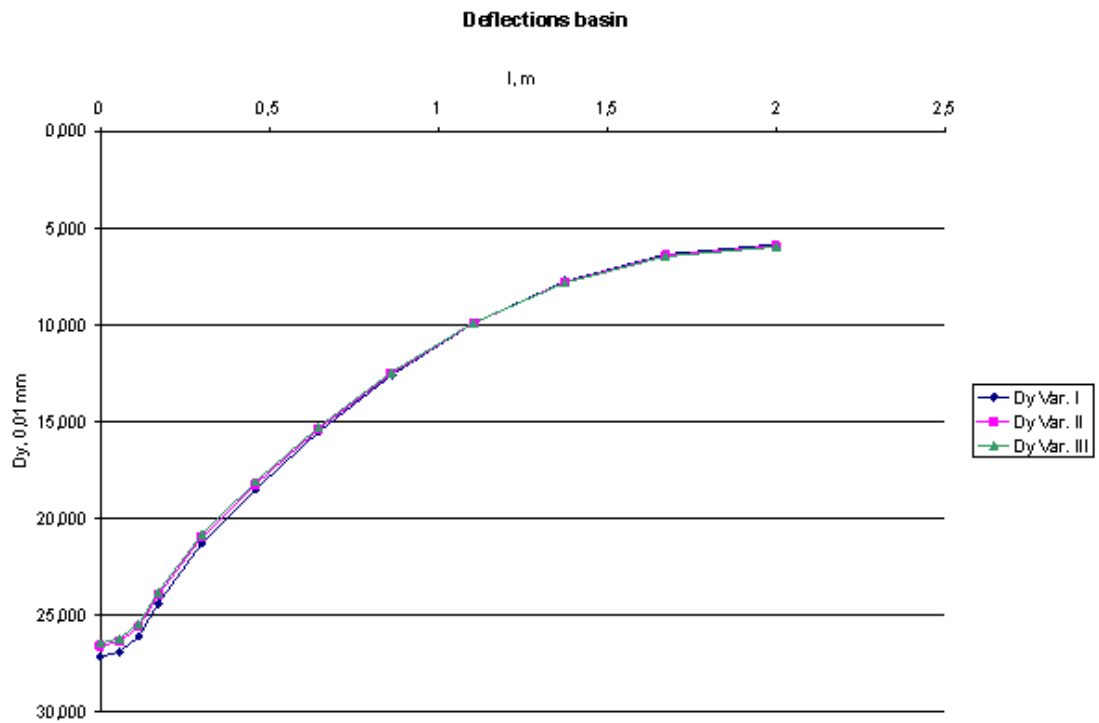


Fig. 6 Deflections basin

4. PERFORMANCE OF THE ANALYZED PAVEMENT STRUCTURES

Verification of reinforced flexible pavement structures variants was done in accordance with the provisions "Reinforcement bituminous layers design normative of flexible and semirigid pavement structures. (Analytical method), indicative AND 550-99". After calculations have resulted the values listed in Table 3. Allowable values are given in Table 4.

Table 3 The values of strains

Layout variant of the geosynthetic material	Horizontal tensile strain at the bottom of the asphalt layers, ϵ_r , microdef.	Vertical compressive strain at the bed road level, ϵ_z , microdef.
Variant I	-106,50	185,02
Variant II	- 103,18	180,11
Variant III	- 103,50	178,21

Table 4 Allowable values corresponding to the design criteria

Layout variant of the geosynthetic material	Admissible calculus traffic, $N_{c,adm}$, m.s.a. of 115 kN	Admissible vertical compressive strain at the bed road level, $\epsilon_{z,adm}$, microdef.
Variant I	3,82	213,05
Variant II	4,33	213,05
Variant III	4,28	213,05

Considering the behavior under traffic of reinforced flexible pavement structures, results that these could handle a traffic volume of standard axle of 115 kN, corresponding to traffic class **T1 - Very hard**, according CD 155-2002.

Current methods of design and reinforcement of flexible pavement structures take into account only the fatigue behavior of asphalt mixtures and neglect their reaction to other important phenomenon to which these are subjected in service ie creep.

Shear stresses that influence the creep phenomenon, are the main generation cause of wave distress type. For this reason, it was aimed also the evaluation of this parameter.

The research found that the shear stresses are manifested at the edge of the wheel - road surface contact and at the interface between the asphalt clothing and base course.

Below are presented the values obtained for shear stress and tensile stress manifested in the asphalt layers.

Table 5 Values of shear and tension stresses

Layout variant of the geosynthetic material	Shear stress at the bottom of the binder course, τ_{rz} , MPa	Horizontal tensile stress at the bottom of the asphalt layers, σ_r , MPa
Variant I	- 0,225	- 0,239
Variant II	- 0,224	- 0,232
Variant III	- 0,234	- 0,232

5. CONCLUSIONS

The studies on determining the optimal layout of the geosynthetic revealed that its location directly on the existing pavement structure (Variant II) is more appropriate to reduce the resulting stress and strain state and to an increase of admissible calculus traffic of about 13%.

Results that the use of geosynthetic materials to reinforce the asphalt layers of flexible pavement structures has a beneficial effect on their bearing capacity, issue also highlighted of the deflections basin (Figure 6).

Since the geosynthetics works well in tensioning applications, in the present study we examined also the influence of their presence in the composition of pavement structures on the shear stresses that occurs in asphalt mixtures.

It was found that the shear stresses values indicate once more the Variant II as the optimal geosynthetic layout.

How to locate the geosynthetic material on thickness of asphalt layers can bring the optimum results in taking repeated loading from traffic.

REFERENCES

1. E. DIACONU, A. BURLACU, *Locul și rolul geocompozitelor în structurile rutiere*, Simpozionul "Tehnologie și siguranță", UT Cluj-Napoca, Cluj-Napoca, 4-5 noiembrie 2004.
2. E. DIACONU, C. RĂCĂNEL, *The Study of Geocomposite Influence on Wearing Course Asphalt Mixture Behavior at Permanent Deformation*, Computational Civil Engineering, International Symposium, Iași, Ed. Societății Academice Matei-Teiu Botez, July 2005.
3. *Normativ privind utilizarea geocompozitelor la ranforsarea structurilor rutiere*, Contract nr. UTCB: 155, (Beneficiar CNADNR S.A. – Compania Națională de Autostrăzi și Drumuri Naționale din România S.A.), 2005.
4. E. DIACONU, C. ROMANESCU, C. RĂCĂNEL, Ș.M. LAZĂR, A. BURLACU, *Ranforsarea straturilor asfaltice cu materiale geocompozite*, Lucrările celei de a III-a Sesiuni Științifice Construcții–Instalații "CIB 2007", Universitatea Transilvania din Brașov și CANAM STEEL România, Brașov, 15-16 noiembrie 2007.
5. C. ROMANESCU, E. DIACONU, C. RĂCĂNEL, Ș.M. LAZĂR, A. BURLACU, *Cercetare privind utilizarea geocompozitului BISTEX în structurile rutiere*, Simpozionul Științific Cercetare, Administrare Rutieră, "CAR 2009", UTCB, București, 10 iulie 2009.
6. AMADEUS, *Advanced Models for Analytical Design of European Pavement Structures*, European Commission under the Transport RTD Programme, Final report of the 4th Framework Programme, march 29th, 2000.
7. C. ROMANESCU, Ș.M. LAZĂR, *Model de analiză cu elemente finite a structurilor rutiere flexibile*, Buletinul Științific al U.T.C.B., Nr. 4, București, 2008.
8. C. ROMANESCU, Ș.M. LAZĂR, *Model cu elemente finite 2D axialsimetrice pentru analiza structurilor rutiere suple*, Lucrările celei de a IV-a Sesiune Științifică Construcții–Instalații "CIB 2008", **Volumul 2**, organizată de Universitatea Transilvania din Brașov și CANAM STEEL România, Brașov, 21-22 noiembrie 2008.
9. C. ROMANESCU, Ș.M. LAZĂR, *Modelarea cu elemente finite a structurilor rutiere flexibile*, Simpozionul Științific Cercetare, Administrare Rutieră, "CAR 2009", UTCB, București, 10 iulie 2009.
10. ***, *Lusas Theory Manual*, FEA Ltd., Forge House, Kingston Upon Thames, United Kingdom, 1999.
11. C. ROMANESCU, E. DIACONU, Ș.M. LAZĂR: *Modelarea numerică a structurilor rutiere suple ranforsate cu geosintetice*, Simpozionul Științific Cercetare, Administrare Rutieră, "CAR 2010", Ediția a III-a, UTCB, București, 9 iulie 2010.

Received September 20, 2010